


Mark 55 Dedicated Push Pull

LORON
Excellence in Action

The versatile LORON Mark 55 Push Pull is the answer for operations that utilize Mark 55 block pallets alongside conventional GMA pallets and slip sheeted loads. Hydraulically position the platens beside the fixed forks for pallet handling, then open the platens to maximum spread, while still seated on the truck, to provide a broad base for slip sheet handling.

Features:

- Heavy duty design uses high strength A514 steel in the linkage, platens, forks and jaw.
- Tall gripper bar eliminates openings that can catch bags. Urethane gripper pad is easily replaced and is designed for long life.
- Push cylinders designed for maximum speed and cushioned at both ends for smooth starts and stops.
- Quick disconnect lower hooks automatically adjust for initial fit and wear.
- Platens fully supported on replaceable, wear resistant bearings.

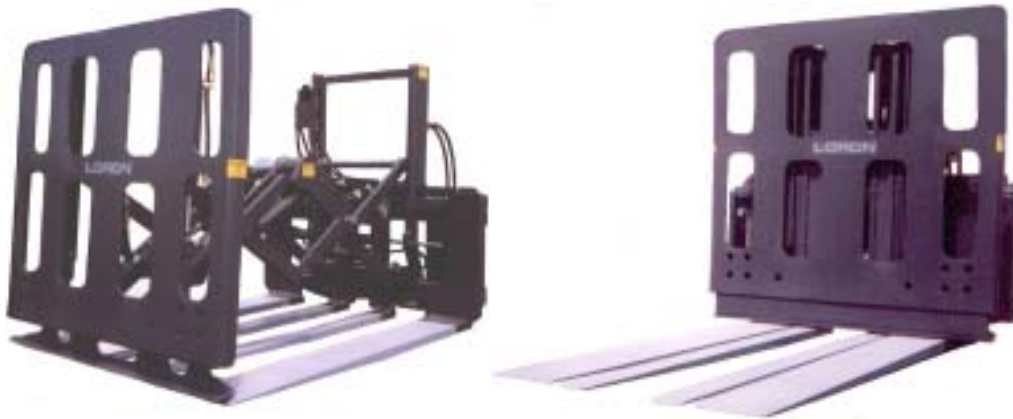

Catalog Number	Description	Capacity lbs. @ 24" Load Center	Inner Fork Width X Length (ins.)	Inner Fork Range (ins.)	Outer Platen Width X Length (ins.)	Outer Platen Range (ins.)	Mounting Class	Weight (lbs.)	Load Thickness (ins.)	Horizontal Center of Gravity (ins.)	Vertical Center of Gravity (ins.)
L35B-PHSM55-1048	Side shifting Push Pull	3,500	3 X 48	13	7 X 48	28 to 40	II	1255	7.4	9.0	9.7
L35B-PHNM55-1048	Non-side shifting Push Pull	3,500	3 X 48	13	7 X 48	28 to 40	II	1245	7.4	9.0	9.7
L48B-PHSM55-1048	Side shifting Push Pull	4,800	3 X 48	13	7 X 48	28 to 40	II	1285	7.4	9.1	9.5
L48B-PHNM55-1048	Non-side shifting Push Pull	4,800	3 X 48	13	7 X 48	28 to 40	II	1275	7.4	9.1	9.5
L48B-PHSM55-1048-3	Side shifting Push Pull	4,800	3 X 48	13	7 X 48	28 to 40	III	1450	10.0	11.6	9.5
L48B-PHNM55-1048-3	Non-side shifting Push Pull	4,800	3 X 48	13	7 X 48	28 to 40	III	1440	10.0	11.6	9.5

Phone: (800) 248-6079
Fax: (360) 578-9934

LORON, Inc.
PO Box 743
Longview, WA 98632